

FOR THE GMAIL ACCOUNTS

11 – Individual accounts For the email accounts, we will need the following:

- 3 Contractor accounts
- 3 Engineer I accounts
- 3 Engineer II accounts
- 1 Engineer III account
- 1 Engineer IV account

The email accounts may follow this format:

constructflow.contractor.1@gmail.com

constructflow.contractor.2@gmail.com

...and so on.

These email accounts will be used for sending reports and may also serve as the login credentials for the system.

All accounts must be private and shall only have access to the projects they are assigned to or involved in. Engineer III and IV shall have access to all projects, subject to the established workflow and approval process.

Automated Email Notification

Before the approval process, the Contractor shall confirm that they are satisfied with the SWA and IAR. Once confirmed, the IAR shall proceed for approval by:

- Engineer II
- Engineer III
- Engineer IV

Once the IAR has been approved by all three engineers, the system shall automatically send an email to the following recipients assigned to the specific project:

- Engineer I
- Engineer II
- Engineer III
- Engineer IV
- Contractor

The email shall include the approved IAR in PDF format. Any selected reports shall also be attached:

- PDM (if selected)
- Bar Chart (if selected)
- S-Curve (if selected)
- SWA (if selected)
- STEWA (if selected)

The IAR and selected reports shall only be available for download and shall only be attached to the email once the IAR has been approved by Engineers II, III, and IV.

However, if the IAR is not approved and requires corrections, the draft shall remain saved in the system and shall be available to the last person who viewed it, as well as the Contractor and Engineer I, for further review and correction.

A project may be deleted by Engineer I only with the required authorization from Engineers II, III, and IV. Once deleted, the project shall be placed in Engineer I's archive for three weeks and may be retrieved during this period. All engineers involved in the project shall be notified of the deletion. The deleted project shall no longer appear in the accounts of other users.

Engineer IV, as the highest-ranking engineer, may delete a project directly. Once deleted by Engineer IV, the project shall be placed in Engineer IV's archive for three weeks and may be retrieved during this period. The deleted project shall not appear in the accounts of other users.

CONTRACTOR'S VIEW

Precedence Diagramming Method

All gray arrows should be enlarged for better visibility. If an activity has multiple dependencies, its box should be centered and properly aligned for better viewing. The subsequent activities must follow the same alignment.

IAR – SWA

They may edit the Inspection Accomplishment Report (IAR) and Statement of Time Elapsed and Work Accomplishment (STEWA) while it is in draft status.

All user inputs that have been edited must be highlighted. Each highlighted edit must have an accompanying comment box where the user can explain the reason for the changes, similar to the commenting feature in Google Docs.

FOR SWA

SWA FORMULAS:

- PREVIOUS: ALL BLANK
- TO DATE: $(\text{PROG. QUANTITY}/2) \times \text{UNIT PRICE}$
- THIS PERIOD: TO DATE - PREVIOUS

NOTE: ALL VALUES SHOULD BE AUTOMATICALLY COMPUTED ONCE THE QUANTITY AND UNIT PRICE ARE ENTERED.

S-CURVE REQUIREMENTS

We have two types of S-curve in this system. The first one is this:

(PDM-Based Target S-Curve)

Please add the following fields to the S-Curve:

- Item No.
- Description
- Quantity (Qty)

- Unit Cost (PHP)
- Amount (PHP)
- WT%

1. PDM SYNCHRONIZATION

The Item No. and Description in the S-Curve must be automatically and immediately synchronized with the PDM.

Any changes, additions, or deletions made to the Item No. or Description in the PDM should automatically be reflected in the S-Curve.

2. AMOUNT (PHP)

For each work item:

$$\text{Amount (PHP)} = \text{Quantity} \times \text{Unit Cost (PHP)}$$

3. TOTAL CONTRACT AMOUNT

The Total Contract Amount shall be the sum of all item amounts:

$$\text{Total Contract Amount} = \Sigma \text{Item Amounts}$$

4. WEIGHT PERCENTAGE (WT%)

The WT% of each work item shall be calculated as:

$$\text{WT\%} = (\text{Item Amount} / \text{Total Contract Amount}) \times 100$$

The total WT% of all work items should equal 100%.

5. TARGET ACCOMPLISHMENT

The Target Accomplishment (%) for each period shall be the sum of the WT% scheduled within that period:

Target Accomplishment (%) = Σ WT% scheduled for the period

Target Accomplishment (PHP) shall be:

Target Accomplishment (PHP) = Target Accomplishment (%) $\times$ Total Contract Amount / 100

6. TOTAL CUMULATIVE ACCOMPLISHMENT

The Total Cumulative Accomplishment (%) shall be calculated as:

Current Cumulative Accomplishment (%) = Previous Cumulative Accomplishment (%) +
Current Period Accomplishment (%)

For the monthly baseline, use 30 days.

Example:

Month 1 = 10%

Month 2 = 15%

Month 3 = 20%

Cumulative:

Month 1 = 10%

Month 2 = 10% + 15% = 25%

Month 3 = 25% + 20% = 45%

7. S-CURVE INTERVALS

The system should allow the contractor/user to choose their preferred S-Curve reporting interval based on the project requirements.

The available options should include:

- 10-day interval
- 30-day / monthly interval

The selected interval should only determine how the S-Curve data is grouped and presented.

The contractor should be able to switch between the 10-day and 30-day/monthly views at any time.

Regardless of the selected S-Curve view, the actual activity start date, end date, and duration must always be based on the PDM.

8. BAR CHART / PDM DURATION

The Bar Chart must always follow the actual duration specified in the PDM.

For example:

- If an activity is 5 days, the bar should represent 5 days.
- If an activity is 12 days, the bar should represent 12 days.
- If an activity is 30 days, the bar should represent 30 days.

The system must not automatically convert or extend activities to a whole month.

The 10-day or 30-day/monthly selection is only for the S-Curve's grouping and reporting. It must not change the actual PDM activity duration.

IMPORTANT:

The 10-day or 30-day setting is only for grouping/summarizing the S-Curve data. It should NOT change the actual activity duration from the PDM.

The Bar Chart should always display the actual number of days specified in the PDM, rather than displaying activities as whole months.

Second type is this:

(Ideal/Theoretical S-Curve)

S-CURVE AND BAR CHART SYNCHRONIZATION

Automatically set the S-Curve and Bar Chart to be synchronized with the PDM by default. The PDM shall serve as the primary basis for the activity schedule, including the activity duration, (start date, end date these two are entered by Engineer 1 under Project Details and shall serve as the basis for all schedule planning), and corresponding WT%.

If the contractor chooses to use the Ideal/Theoretical S-Curve instead, the system should allow the contractor to configure the S-Curve and Bar Chart according to their preferred theoretical schedule or presentation.

The S-Curve and Bar Chart must always remain synchronized with each other, regardless of whether the contractor uses the PDM-Based Target S-Curve or the Ideal/Theoretical S-Curve.

Any changes to the selected schedule, interval, duration, or other relevant parameters must be reflected consistently in both the S-Curve and Bar Chart.

The contractor should have the flexibility to choose between:

1. PDM-Based Target S-Curve – based on the actual PDM schedule and activity durations.

2. Ideal/Theoretical S-Curve – based on the theoretical S-Curve formula and the contractor's preferred schedule.


Regardless of the selected method, the S-Curve and Bar Chart must always correspond to the same schedule and remain synchronized.

The formula:

$$=100 * (1 - \text{COS}(\pi * (\text{Current_Period} / \text{Total_Periods}))) / 2$$

EXAMPLES OF (PDM-Based Target S-Curve) FOR YOUR REFERENCE:

The terms used in both examples mean the same thing.

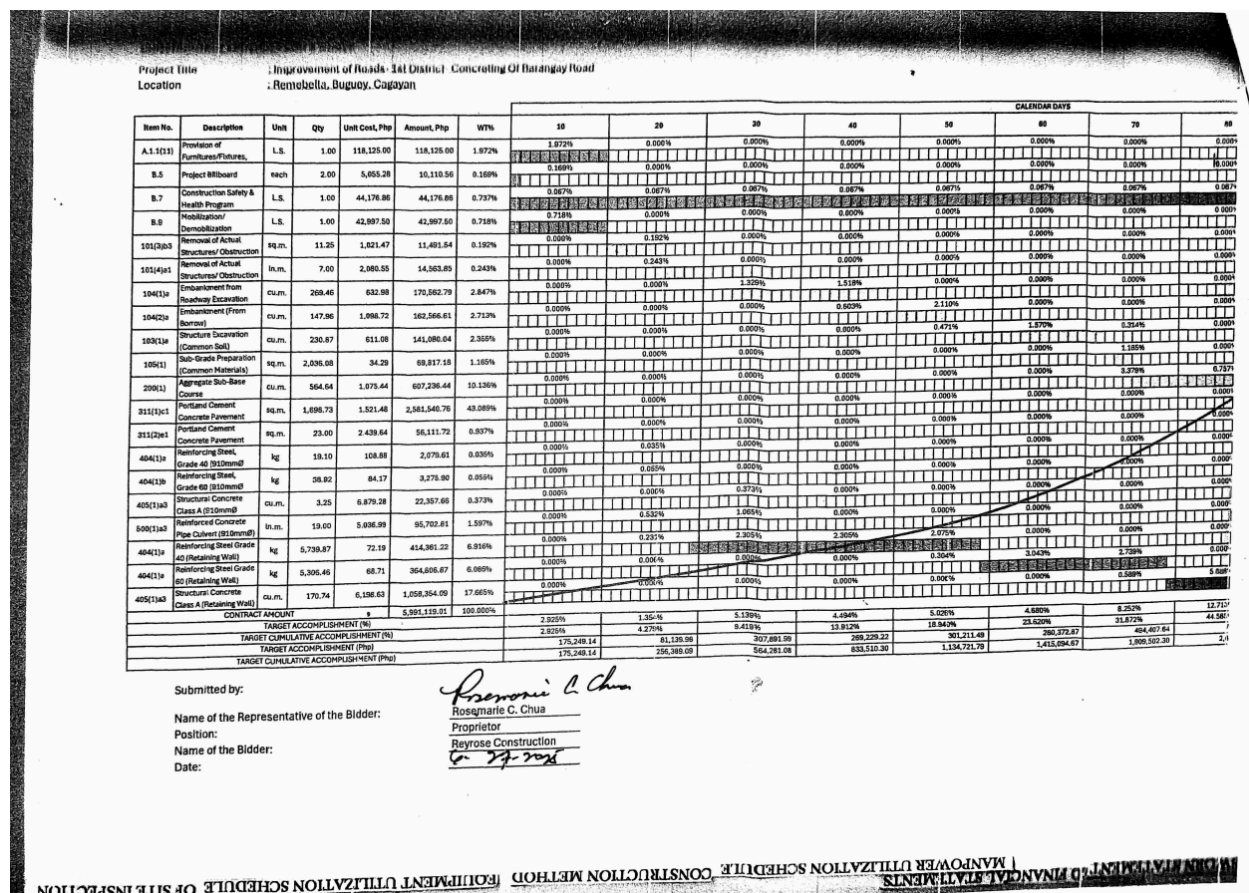

213

ITEM NO.	DESCRIPTION	UNIT PRICE	UNIT	QTY	AMOUNT	% WT.	CONSTRUCTION SCHEDULE AND S-CURVE											
I	Facilities for the Engineer						MONTH											
							1	2	3	4	5	6	7	8	9	10	11	12
YEAR CALENDAR DAYS																		
MONTH 1 MONTH 2 MONTH 3 MONTH 4 MONTH 5 MONTH 6 MONTH 7 MONTH 8 MONTH 9 MONTH 10 MONTH 11 MONTH 12																		
30 30 60 90 120 150 180 210 240 270 300 330 360																		
A.1.1 (1)	Provision of Furniture/Furniture, Equipment & Appliances for the Field Office for the Engineers	164,850.00	1 s	1.00	164,850.00	0.571												
II	Other General Requirements																	
B.5	Project Billboard																	
B.7	Construction Safety & Health Program	10,577.71	each	2.00	21,155.42	0.073												
B.9	Mobilization/Demobilization	191,711.94	1 s	1.00	191,711.94	0.664												
III	Earthworks	141,699.00	1 s	1.00	141,699.00	0.481												
103(b)	Pipe Culvert and Drain Excavation (Common Soil)	332.36	cu.m	101.60	33,757.62	0.117												
104(1)a	Embankment from Roadway Excavation	249.81	cu.m.	2,005.07	500,485.52	1.734												
104(2)a	Embankment from Borrow	461.09	cu.m.	7,959.08	3,669,842.98	12.716												
105(1)	Sub-grade Preparation (Common Materials)	19.45	sq.m.	23,555.40	458,192.53	1.588												
IV	Sub-base Course																	
200(1)	Aggregate Sub-base Course	496.59	cu.m.	7,197.59	3,562,279.32	12.136												
V	Surface Course																	
311(1)a	Portland Cement Concrete Pavement (Unreinforced), 230mm Bl.	1,315.16	sq.m.	14,621.40	19,226,485.42	66.632												
VI	Drainage and Slope Protection																	
404(1)a	Reinforcing Steel, Grade 40 (Ø10mm Ø RCPC)	86.44	kgs	1,099.09	75,221.72	0.261												
404(1)b	Reinforcing Steel, Grade 60 (Ø10mm Ø RCPC)	70.69	kgs	1,010.43	71,427.30	0.248												
405(1)a3	Structural Concrete Class A (Ø10mm Ø RCPC)	8,078.54	cu.m.	47.63	387,264.42	1.342												
500(1)a3	Reinforced Concrete Pipe Culvert (Ø10mm Ø RCPC)	5,567.26	sq.m.	74.00	411,561.70	1.427												
OVERALL TOTAL AMOUNT					28,889,225.89	100.00												


ACCOMPLISHMENT	MONTHLY ACCOMPLISHMENT (%)	0.603	0.226	1.537	9.946	5.923	10.225	7.622	13.672	15.863	18.114	11.462	4.986
CASHFLOW	CUMULATIVE ACCOMPLISHMENT (%)	0.603	0.829	2.366	12.312	18.255	28.459	36.281	49.953	65.846	83.961	95.423	100.000
	MONTHLY CASHFLOW (PHP)	174,073.05	65,218.96	443,423.05	2,876,368.72	1,708,368.72	2,860,739.00	1,946,682.47	2,297,325.73	4,986,673.61	5,237,692.39	3,364,764.34	1,264,893.96
	CUMULATIVE CASHFLOW (PHP)	174,073.05	239,292.02	682,715.06	3,559,083.52	5,267,361.74	8,213,100.74	10,479,435.47	14,476,114.09	19,502,784.40	24,220,437.38	27,536,142.33	28,889,225.89

Submitted By: 

RICA

SUBMITTED BY: 
RICARDO D. INTERIOR, JR.
 General Manager - J.D. Interior Junior Construction

EXAMPLE OF (Ideal/Theoretical S-Curve)

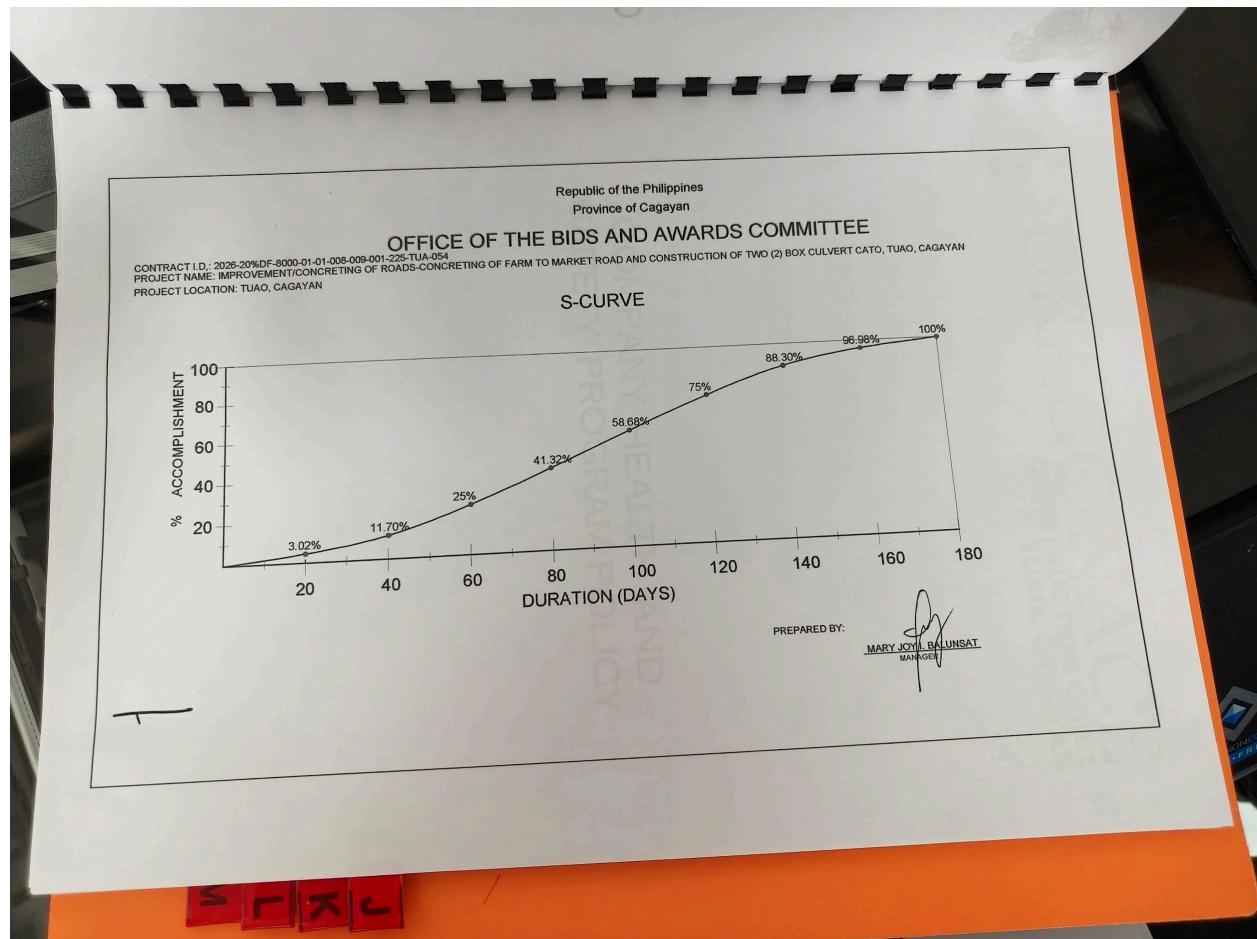



Report preview

Close

Republic of the Philippines
PROVINCE OF CAGAYAN
Capitol Hills, Tuguegarao City
PROVINCIAL ENGINEER'S OFFICE

STATEMENT OF WORK ACCOMPLISHMENT

As of September 20, 2026

CONSTRUCTION OF BOX CULVERT ALONG CATO-CONNER ROAD, TUAO
CATO, TUAO, CAGAYAN→ MOVE TO THE CENTER, REFER TO THE EXCEL
FILE PROVIDED BELOW

ITEM NO.	DESCRIPTION OF WORK	PROGRAMMED QUANTITY	UNIT PRICE	UNIT	CONTRACT AMOUNT	WEIGHT %	ACCOMPLISHMENT			WEIGHT %	REMARKS/STATUS
							PREVIOUS	THIS PERIOD	TO DATE		
I.	OTHER GENERAL REQUIREMENTS	0.00	0.00		0.00	0.00		0.00	0.00	0.00	Not yet started.
B.5	Project Billboard / Signboard	2.00	6,195.00	Each	12,390.00	0.41		0.00	0.00	0.00	Not yet started.
B.7 (1)	Occupational Safety and Health Program	1.00	15,561.00	L.S	15,561.00	0.52		0.00	0.00	0.00	Not yet started.
B.9	Mobilization / Demobilization	1.00	29,488.20	L.S	29,488.20	0.99		0.00	0.00	0.00	Not yet started.
II.	WORK ITEMS	0.00	0.00		0.00	0.00		0.00	0.00	0.00	Not yet started.
101 (3) b1	Removal of Actual Structures/Obstruction 0.15 m thick PCCP (Unreinforced)	88.45	582.35	sq.m.	51,508.86	1.72		0.00	0.00	0.00	Not yet started.
101 (6) b1	Removal of Structures and Obstruction	40.85	673.88	cu.m.	27,528.00	0.92		0.00	0.00	0.00	Not yet started.
103 (1) a	Structure Excavation Common Soil	36.25	462.81	cu.m.	16,778.86	0.56		0.00	0.00	0.00	Not yet started.
105 (1) a	Subgrade Preparation Common Material	166.05	142.63	sq.m.	23,683.71	0.79		0.00	0.00	0.00	Not yet started.
III.	SUB-BASE COURSE	0.00	0.00		0.00	0.00		0.00	0.00	0.00	Not yet started.
200(1)	Aggregate Sub-Base Course	42.64	942.84	cu.m.	40,202.70	1.35		0.00	0.00	0.00	Not yet started.
IV.	SURFACE COURSE	0.00	0.00		0.00	0.00		0.00	0.00	0.00	Not yet started.
311 (1) c1	Portland Cement Concrete Pavement (Unreinforced) 0.23 m thick 14 days	125.05	2,614.56	sq.m.	326,950.73	10.94		0.00	0.00	0.00	Not yet started.
311 (2)	Portland Cement Concrete Pavement (Reinforced) 0.28 m thick 14 days	49.07	2,792.47	sq.m.	137,026.50	4.58		0.00	0.00	0.00	Not yet started.

WIDEN

WIDEN

Report preview

Close

As of September 20, 2026

CONSTRUCTION OF BOX CULVERT ALONG CATO-CONNER ROAD, TUAO
CATO, TUAO, CAGAYAN

ITEM NO.	DESCRIPTION OF WORK	PROGRAMMED QUANTITY	UNIT PRICE	UNIT	CONTRACT AMOUNT	WEIGHT %	ACCOMPLISHMENT			WEIGHT %	REMARKS/STATUS
							PREVIOUS	THIS PERIOD	TO DATE		
I.	OTHER GENERAL REQUIREMENTS	0.00	0.00		0.00	0.00		0.00	0.00	0.00	Not yet started.
B.5	Project Billboard / Signboard	2.00	6,195.00	Each	12,390.00	0.41		0.00	0.00	0.00	Not yet started.
B.7 (1)	Occupational Safety and Health Program	1.00	15,561.00	L.S.	15,561.00	0.52		0.00	0.00	0.00	Not yet started.
B.9	Mobilization / Demobilization	1.00	29,488.20	L.S.	29,488.20	0.99		0.00	0.00	0.00	Not yet started.
II.	WORK ITEMS	0.00	0.00		0.00	0.00		0.00	0.00	0.00	Not yet started.
101 (3) b1	Removal of Actual Structures/Obstruction 0.15 m thick PCCP (Unreinforced)	88.45	582.35	sq.m.	51,508.86	1.72		0.00	0.00	0.00	Not yet started.
101 (6) 1	Removal of Structures and Obstruction	40.85	673.88	cu.m.	27,528.00	0.92		0.00	0.00	0.00	Not yet started.
103 (1) a	Structure Excavation Common Soil	36.25	462.81	cu.m.	16,778.86	0.56		0.00	0.00	0.00	Not yet started.
105 (1) a	Subgrade Preparation Common Material	166.05	142.63	sq.m.	23,683.71	0.79		0.00	0.00	0.00	Not yet started.
III.	SUB-BASE COURSE	0.00	0.00		0.00	0.00		0.00	0.00	0.00	Not yet started.
200(1)	Aggregate Sub-Base Course	42.64	942.84	cu.m.	40,202.70	1.35		0.00	0.00	0.00	Not yet started.
IV.	SURFACE COURSE	0.00	0.00		0.00	0.00		0.00	0.00	0.00	Not yet started.
311 (1) c1	Portland Cement Concrete Pavement (Unreinforced) 0.23 m thick 14 days	125.05	2,614.56	sq.m.	326,950.73	10.94		0.00	0.00	0.00	Not yet started.
311 (2) e1	Portland Cement Concrete Pavement (Reinforced) 0.28 m thick 14 days	49.07	2,792.47	sq.m.	137,026.50	4.59		0.00	0.00	0.00	Not yet started.
V.	DRAINAGE AND SLOPE PROTECTION	0.00	0.00		0.00	0.00		0.00	0.00	0.00	Not yet started.
a.	RETAINING WALL	0.00	0.00		0.00	0.00		0.00	0.00	0.00	Not yet started.
404 (1) a	Reinforcing Steel Grade 40 Kilogram	1,499.30	119.31	kgs	178,881.48	5.99		0.00	0.00	0.00	Not yet started.
404 (1) b	Reinforcing Steel Grade 60 Kilogram 404A (1) a Epoxy-Coated Reinforcing Steel Bars Grade 40 Kilogram 404A (1) b Epoxy-Coated Reinforcing Steel Bars Grade 60 Kilogram	1,665.38	128.04	kgs	213,235.26	7.14		0.00	0.00	0.00	Not yet started.
405 (1) a3	Structural Concrete 20.68MPa A 28 days	71.29	5,927.80	cu.m.	422,592.86	14.15		0.00	0.00	0.00	Not yet started.

DARKEV ALL
ROWS WITH
ROMAN
NUMERALS.
REFER TO
THE EXCEL
FILE BELOW.

columns (quantity, amount, weight %)

FORMULA PROVIDED BELOW

Prog. Qty	Unit Price	Unit	Contract Amt	Weight %	Accomplishment			Wt % Accomp.	Remarks/Status
					Previous	This Period	To Date		
			0.00	0.00			0	0.00	Not yet started.
2	6195	Eac	12,390.00	0.41			0	0.00	Not yet started.
1	15561	L.S	15,561.00	0.52			0	0.00	Not yet started.
1	29488.2	L.S.	29,488.20	0.99			0	0.00	Not yet started.
			0.00	0.00			0	0.00	Not yet started.
88.45	582.35	sq.r	51,508.86	1.72			0	0.00	Not yet started.
40.85	673.88	cu.r	27,528.00	0.92			0	0.00	Not yet started.
36.25	462.81	cu.r	16,776.86	0.56			0	0.00	Not yet started.
166.05	142.63	sq.r	23,683.71	0.79			0	0.00	Not yet started.
			0.00	0.00			0	0.00	Not yet started.
42.64	942.84	cu.r	40,202.70	1.35			0	0.00	Not yet started.
			0.00	0.00			0	0.00	Not yet started.
125.05	2614.56	sq.r	326,950.73	10.94			0	0.00	Not yet started.
49.07	2792.47	sq.r	137,026.50	4.59			0	0.00	Not yet started.
			0.00	0.00			0	0.00	Not yet started.
			0.00	0.00			0	0.00	Not yet started.
1499.3	119.31	kgs	178,881.48	5.99			0	0.00	Not yet started.
1665.38	128.04	kgs	213,235.26	7.14			0	0.00	Not yet started.
71.29	5927.8	cu.r	422,592.86	14.15			0	0.00	Not yet started.
			0.00	0.00			0	0.00	Not yet started.
4406.33	109.59	kgs	482,889.70	16.16			0	0.00	Not yet started.
3045.99	125.23	kgs	381,449.33	12.77			0	0.00	Not yet started.

FORMATS SHOULD BE LIKE THIS FOR SINGLE PUMPS:

ex. 1.00
2.00
3.00

WIDEN



- REF TO THE
- EXCEL FILE PROVIDED FOR THEIR FORMULA

WIDEN

FOR PDM

PRECEDENCE DIAGRAMMING METHOD (PDM)

Precedence Diagram

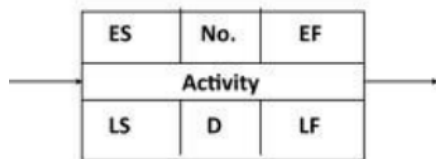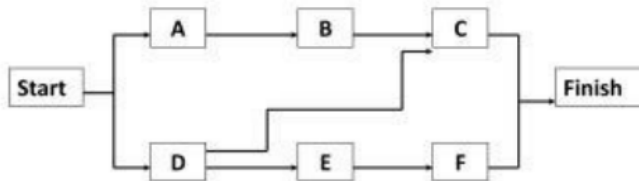

D: Duration
ES: Early Start
EF: Early Finish
LS: Latest Start
LF: Latest Finish

1665.38	128.04	kgs	213,235.26	7.14		0	0.00	Not yet started.	×
71.29	5927.8	cu.r	422,592.86	14.15		0	0.00	Not yet started.	×
			0.00	0.00		0	0.00	Not yet started.	×
4406.33	109.59	kgs	482,889.70	16.16		0	0.00	Not yet started.	×
3045.99	125.23	kgs	381,449.33	12.77		0	0.00	Not yet started.	×
101.82	6160.48	cu.r	627,260.07	21.00		0	0.00	Not yet started.	×
TOTAL			2,987,425.26	100.00			0.00		

CONTRACT
AMOUNT

THIS PERIOD

WEIGHT
% ACCOMP.

i.7 (1), 311 (1) c1) — description and unit auto-fill from the DPWH pay-item catalog (3,268 items).

Value will come from 'WEIGHT% ACCOMP' ← % This Accomplishment 0.00%

Value will come from 'CONTRACT AMOUNT' ← Total Project Cost P 2,987,425.26

Value will come from 'THIS PERIOD' ← Total This Accomplishment P 0.00

Less: Advance Payment 359431.86 → THIS SECTION SHOULD NOT BE AUTO FILLED

Value will come from 'THIS PERIOD - LESS' ← Total Voucher P -359,431.86

Total Voucher = Total This Accomplishment - Less

Save draft

Changes auto-save after you pause typing.

Preview

Send to contractor

Submit for review

Office

Provincial Engineer's Office
Province of Cagayan - Progress
monitoring

Dashboard

Prepare Schedule

Bar Chart

S-Curve

PDM Schedule

IAR

Reports

PDM SCHEDULING

Precedence Diagramming Method

Network diagram showing activity sequencing and dependencies. Each node shows ES / No. / EF, activity name, and LS / D / LF per the precedence diagram template.

CONSTRUCTION OF BOX CULVERT ALONG CATO-CONNER ROAD, TUAO

Edit schedule

PROJECT DURATION


180 days

CRITICAL ACTIVITIES

A → B → E → F → G → H → I

DEPENDENCIES


FS

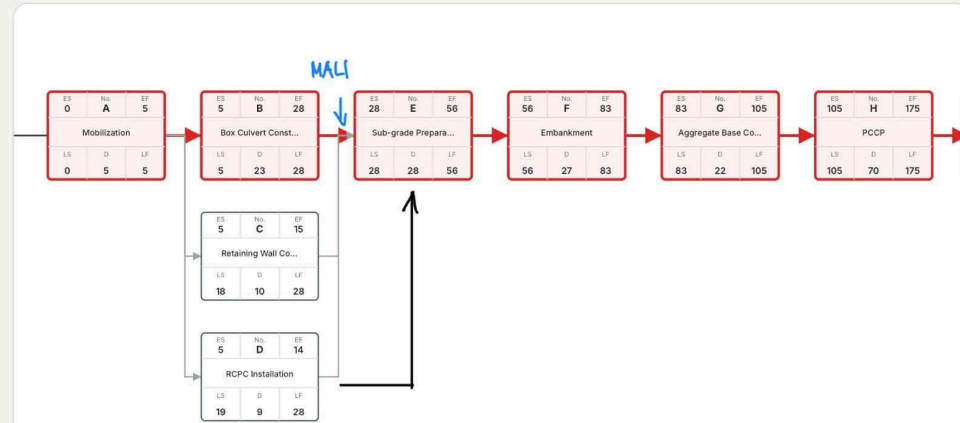


and LS-ES = 0) — Non-critical dependency Project start / end (day 0 / finish) Same ES = same column (stacked vertically)


Dependencies (no auto links). Lines to *end* are for activities with no successor — not a link between those activities.

ch: Predecessor → Activity → End)

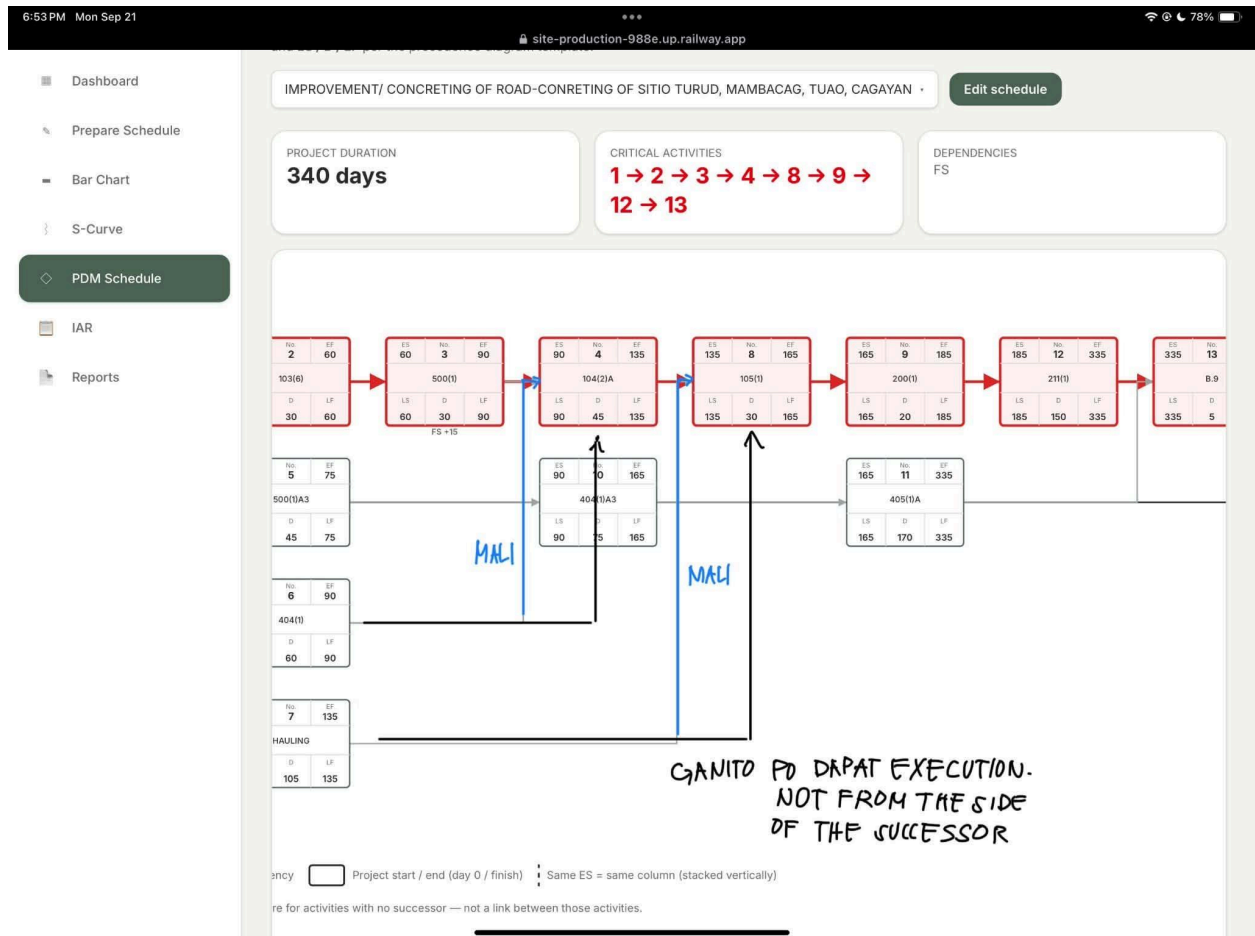


BAR CHART

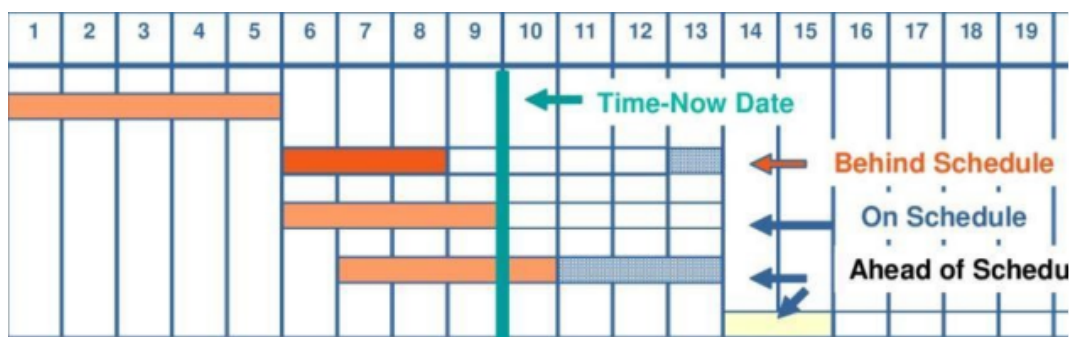

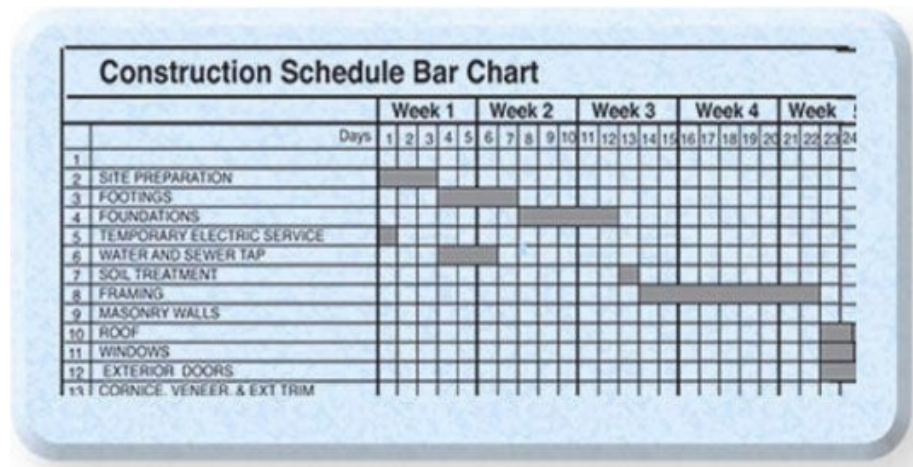

S-CURVE

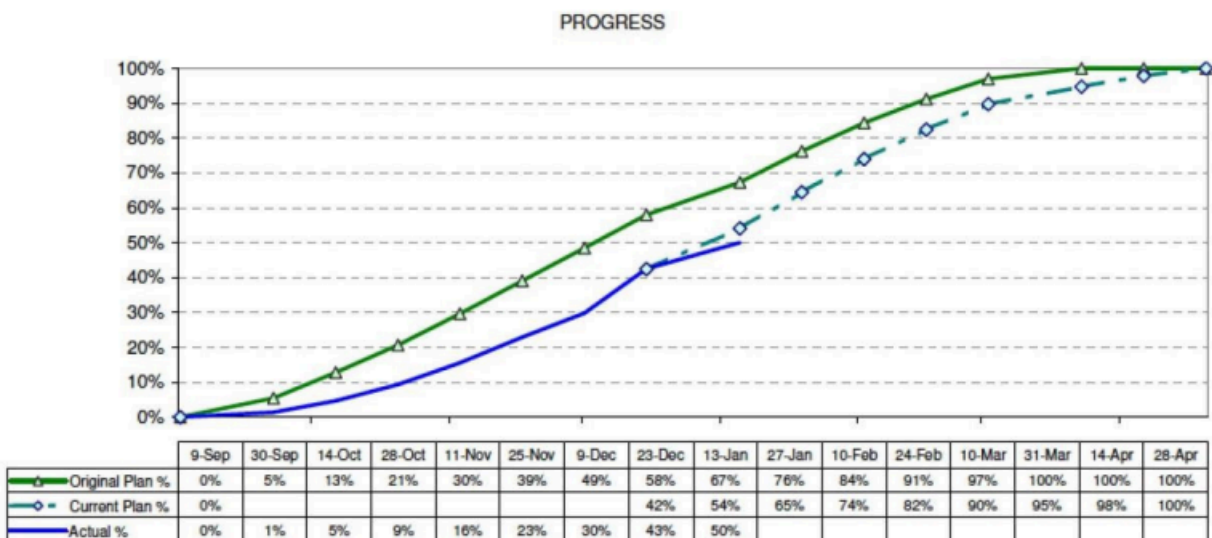

EXPLANATION FOR THE FEATURES

Precedence Diagramming Method (PDM) – usually vini-visualize niya or pinapakita sequencing nung mga activities. Dito ma-ddetermine mo if alin sa mga activities ang nagc-cause ng pagkabagal ng project. Most importantly, dito mo mad-determine yung critical path ng isang project or yung longest series that determines the project's shortest time completion.

Different types of sequencing:

FINISH TO START – hinihi pwede mag-start ang panibagong task without completing the first task. So you'll need to finish the first one before moving on. Example is, hindi ka pwede magbuhos ng concrete if hindi pa natatapos yung formworks.

START TO START – pwede ka na mags-start sa next activity kahit hindi pa tapos yung una. Example, pwede ka na mag-install ng plumbing fixtures kahit hindi pa natatapos ikabit yung roof.

FINISH TO FINISH – dapat tapos mo na yung unang task para ma-consider na tapos na rin yung second task. Di naman pwedeng tapos ka na sa paglilinis ng buong site kahit hindi ka pa tapos mag-install ng electrical wirings.

START TO FINISH – usually ginagamit to for continuous work. For example, may tubig sa na-excavate na lupa and need mo mag-pour ng cement doon. Need mo muna i-pump yung tubig out of the excavated area. Tapos mag-pour ka ng concrete, continuous lang pag-pumo hanggat mapuno mo yung area ng concrete at di bumalik yung tubig.

Bar chart – parang pinapakita rito if kailan ang start date and end date. Kailan matatapos yung specific work na yon. For instance, sa architectural works, nandoon yung window and door installations. Parang pinapakita niya ron if kailan ang start ng installation and kung kailan matatapos. Yung duration is pwede per day, per week or per month. Depende sa i-sset ni engineer. Parang pinapakita rito if ahead ka ba sa schedule or behind.

S-curve analysis – Dito mine-measure yung progress ng project base sa original plan. Sa graph makikita yung time and progress ng accomplished work and duration for that specific work. Dito na-mmonitor if na-ddelay ba yung project. Dito rin parang mas madaling nakikita or navi-visualize yung actual plan and yung result. Mag-ge-generate ng bagong s-curve kapag may slippage or delay na nangyari sa specific week or month.